

# Dragon X SPSL-HF-4.0/8.0

*Portable and Powerful*



**APR**



Overlay console  
option

Touch screen  
option



APR Module

LED Collimator

Laser indicator


Multi-positioning arm

**HF Generator 4/8Kw**  
**125 kVp, 100 mA, 250 mAs**

# Portable X-ray System

SPECIFICATIONS	High Frequency X-ray Generators
<b>MODELS</b>	<b>SPSL-HF- 4.0 / SPSL-HF - 8.0</b>
<b>CONSTANT POTENTIAL kW RATINGS</b>	<b>4.0 / 8.0</b>
kVp RANGE in 1kVp STEPS accuracy	40 to 125 ± 5%
<b>HIGH FREQUENCY RIPPLE</b>	<b>300 kHz</b>
mA STATIONS	5, 6.4, 8, 10, 12.5, 16, 20, 25, 32, 40, 50, 64, 80, 100
EXPOSURE TIME RANGE NUMBER OF STATIONS	0.001 - 10 seconds 41 (in 25% steps)
mAs RANGE NUMBER OF STATIONS accuracy	0.1 - 250 mAs 34 (in 25% steps) 5%
X-RAY TUBE Stationary Anode TWO Focal Spots: Anode Heat Storage Capacity Target Angle	Yes 0.6 mm - 1.5 mm / 0.6 mm - 2.8 mm 40.000 HU / 76.000 HU 14° / 14°
RED LASER POINTER	OPTIONAL
POWER CORD EXPOSURE CORD	6 meters 3 meters
LINE REGULATION	Single-Phase Line Automatic Regulation <b>AUTOMATIC OUTPUT POWER ADAPTATION TO POWER LINE CONDITIONS</b>
LINE POWER REQUIREMENTS +/- 10% VAC (50/60Hz)	110 VAC - 240 VAC / 220 VAC - 240 VAC
WEIGHTS	61 Kg

## DIMENSIONS

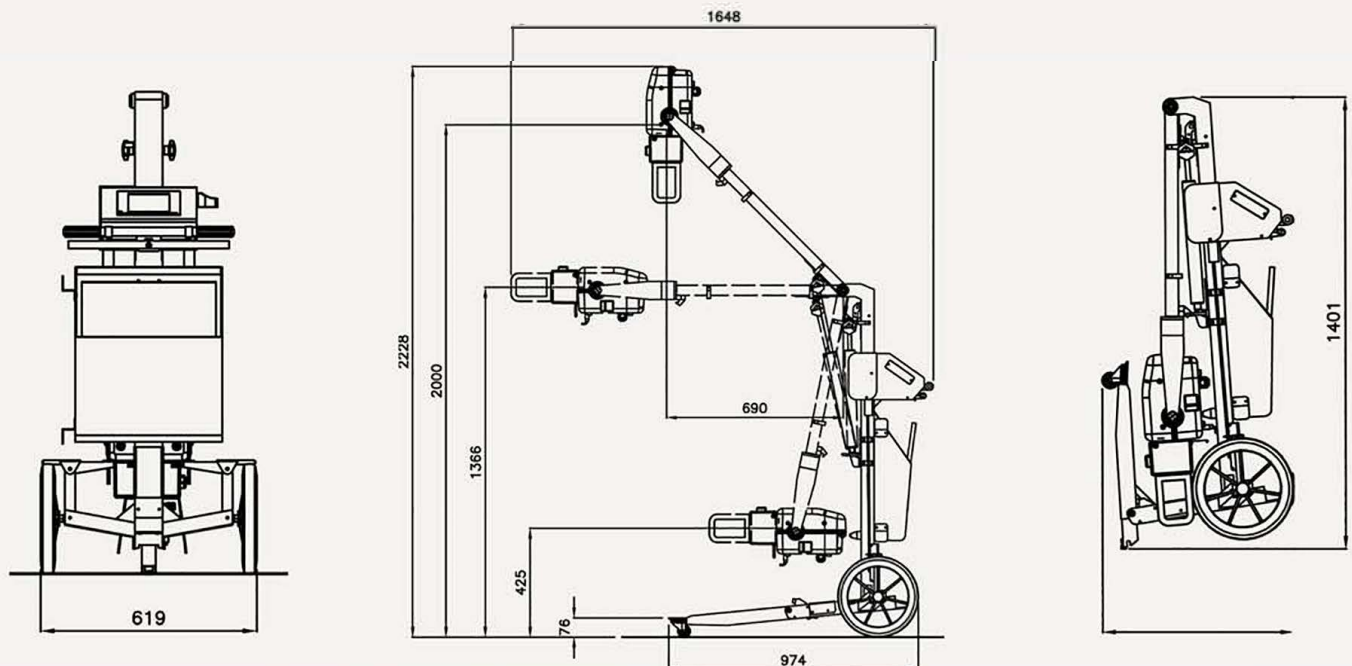

X-ray Repair & Sales, Inc.  
(877)852-9729  
www.x-rayrepair2sales.com