

# Dragon X SPSL-HF-4.0/8.0

*Portable and Powerful*



Overlay console option



Touch screen option

**APR**



APR Module

LED Collimator

Laser indicator


Multi-positioning arm

**HF Generator 4/8Kw**  
**125 kVp, 100 mA, 250 mAs**

# Portable X-ray System

SPECIFICATIONS		High Frequency X-ray Generators	
<b>MODELS</b>	<b>SPSL-HF- 4.0 / SPSL-HF - 8.0</b>		
<b>CONSTANT POTENTIAL kW RATINGS</b>	<b>4.0 / 8.0</b>		
kVp RANGE in 1kVp STEPS accuracy	40 to <b>125</b> ± 5%		
<b>HIGH FREQUENCY RIPPLE</b>	<b>300 kHz</b>		
mA STATIONS	5, 6.4, 8, 10, 12.5, 16, 20, 25, 32, 40, 50, 64, 80, 100		
EXPOSURE TIME RANGE NUMBER OF STATIONS	0.001 - 10 seconds 41 (in 25% steps)		
mAs RANGE NUMBER OF STATIONS accuracy	0.1 - <b>250 mAs</b> 34 (in 25% steps) 5%		
X-RAY TUBE Stationary Anode TWO Focal Spots: Anode Heat Storage Capacity Target Angle	Yes 0.6 mm - 1.5 mm 40.000 HU 14°	Yes 0.6 mm - 2.8 mm 76.000 HU 14°	
RED LASER POINTER	OPTIONAL		
POWER CORD EXPOSURE CORD	6 meters 3 meters		
LINE REGULATION	Single-Phase Line Automatic Regulation <b>AUTOMATIC OUTPUT POWER ADAPTATION TO POWER LINE CONDITIONS</b>		
LINE POWER REQUIREMENTS <b>+/- 10% VAC (50/60Hz)</b>	110 VAC - 240 VAC / 220 VAC - 240 VAC		
WEIGHTS	61 Kg		

## DIMENSIONS

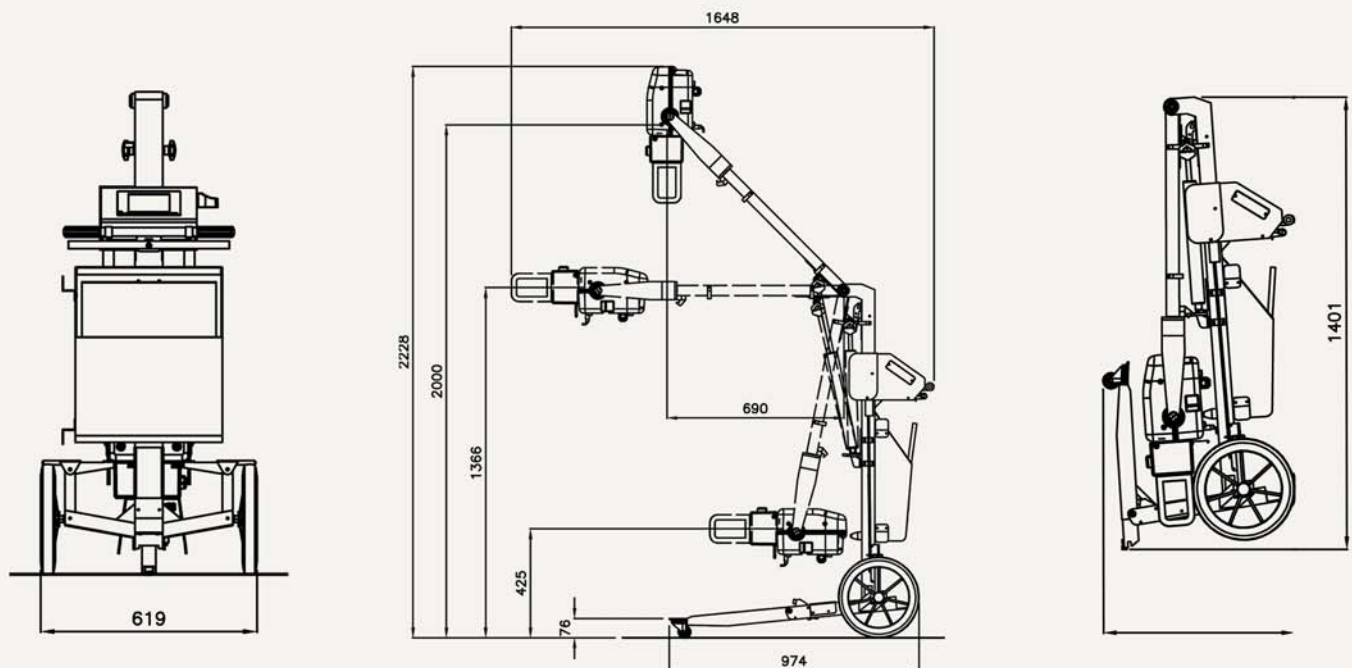

**SEDECAL**  
C/ Pelaya, 13 - Pol. Ind. "Río de Janeiro"  
28110 - Algete (Madrid-SPAIN)  
Central Offices:  
Tel: (34) 91 - 628 0544  
Fax: (34) 902 190 385  
Email: info@sedecal.com

**SEDECAL USA Inc**  
230 Lexington Drive  
Buffalo Grove, Illinois 60089  
USA  
Tel: 1 (847) 394 - 6960  
Fax: 1 (847) 394 - 6966  
Email: sales@sedecalusa.com

